

ELECTRICAL NOTES:

- All conduits to have a minimum of 2 #12 THHN wires (10' Standard #8's) and shall be minimum of 2 1/2" unless otherwise noted.
- All electrical floor outlet units (housing) shall be set flush on the concrete or vinyl floor.
- The contractor shall install in all after cast slabs, two (2) "Paluxi" Packets (fire stop) one of each side of the after cast baffles.
- All device plates for wall outlets shall be brush satin finish, anodized aluminum device plates for telephone outlets shall contain a bushed hole.
- Power interruptions and core drilling will be permitted only between the hours of 8:00 P.m. and 5:00 A.m.
- Contractor shall not be permitted to change the floor.
- When installing equipment outlets, lighting and/or reconnections in the underfloor system shall be made in header duct only. Contractor shall install low from each receptacle to the header duct. All exposed wiring between the removed outlets and header duct is to be removed by the contractor.
- Circuits that are designated with numbers 186 to 31 and above are not existing in the header duct. Contractor is to install and connect the appropriate quantity of wires from them to be services, back to the designated panel via the floor wall and header duct.
- When installing any special purpose outlets, that are shown connected to circuits other than circuit 7-30 inclusive, the wires shall be installed by the contractor to the nearest available panel. The contractor shall modify the panel directory to reflect the circuit availability.
- Minimum distance for all combination telephone / duplex receptacles an/or receptacles shall be 6" from walls or corners, unless otherwise indicated on drawings.

THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE INSTALLATION OF ANY MATERIALS IN EXCESS OF THE QUANTITIES SHOWN ON THE DRAWINGS.

NOTES:

- UNLESS SPECIFICALLY NOTED OTHERWISE ELECTRIC OUTLETS ARE TO BE CONNECTED TO THE CIRCUIT WHICH IS DESIGNATED AT THE END OF EACH CELL.
- LOCATIONS FOR OUTLETS SUBJECT TO UNDERFLOOR DUCT SYSTEM - CONSULT WITH ARCHITECT IF DUCT SYSTEM IS CLOSE TO THE DESIRED LOCATION.

TOTAL OCCUPANCY 7-PERSONS

GENERAL NOTE:

NO PACKING OR CRATING MATERIAL OF ANY KIND IS TO BE STORED IN PRODUCT DISPLAY ROOM.

NOTE:
ALL WORK TO BE DONE IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND THE N.Y.C.B.C.


WALL OUTLET	CONCEALED 1" BUSHED CONDUIT
NEW DUPLEX CONVENIENCE OUTLET	
NEW TELEPHONE OUTLET	
UNDERFLOOR DUCT	
POWER CELL	
HEADER DUCT	
HEADER DUCT JUNCTION	
TELEPHONE CELL	
WALL MOUNTED TELEPHONE OUTLET	

MATERIALS FURNISHED BY THE P.A.	QUANT.
FLUORESCENT LIGHT FIXTURE (20x100)	23
FLUORESCENT LIGHT FIXTURE (20x50)	1
ADAPTER FITTING COND. POWER & TEL. DUPLEX REC.	7
UNDERFLOOR BOX ASSEMBLY	12
PALUXI PACK	7
CONDUIT ADAPTERS (DOUBLE)	3
CONDUIT ADAPTERS (SINGLE)	1

RELEASED FOR BIDDING
BY *[Signature]* DATE 1-15-80

RELEASED FOR CONSTRUCTION
BY *[Signature]* DATE 2/28/80
MANAGER, WTC PLANNING DIVISION

no.	date	REVISIONS
1	1-8-80	ADDED GENERAL NOTE AS INDICATED.
2	12-16-79	GENERAL REV. AS PER "PORT AUTHORITY" ENG. COMMENTS DATED 12-5-79.
3	10-11-79	GENERAL REV. AS PER "PORT AUTHORITY" ENG. COMMENTS DATED 9-20-79.

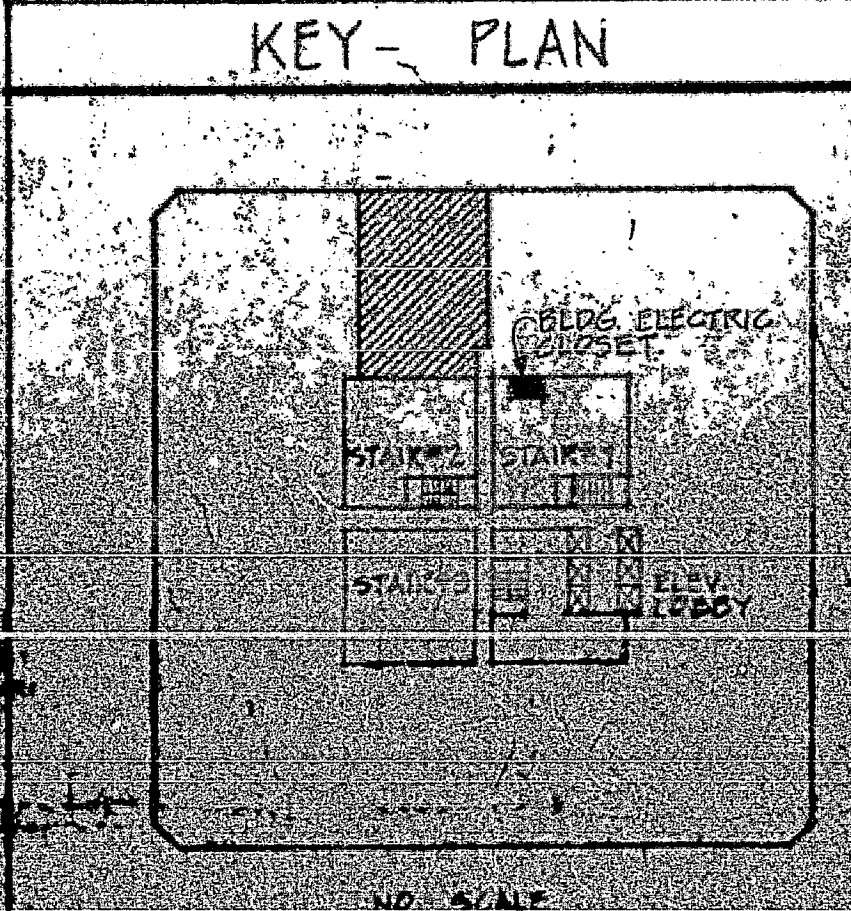

ZANUSSI CORP. of AMERICA
ONE WORLD TRADE CENTER

ELEC. TELE. & FURN. PLAN

DI SANTO ASSOCIATES
ARCHITECTS - INTERIOR DESIGN

180 CENTRAL PARK SO. NYC 10019 181-3073

DATE 1-15-80
DRAWN BY 102 SE
CHECKED BY